


Type Designation	4103
Designation IEC	LR03
System	Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	5 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	1200 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	11
Volume [ccm]	3.5



Dimensions [mm]	min:	max:
Ø	9.5	10.5
A	-	44.5
B	43.3	-
C	4.3	-
E	-	0.5
F	-	3.8
G	0.8	-

Typical Capacities (at 20°C):

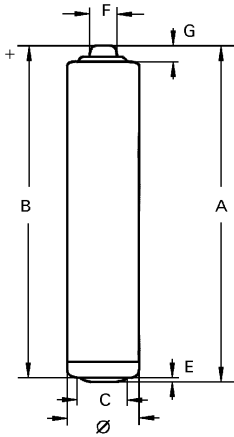

Discharge Type	Load	End Voltage[V]	1.0	0.9
15S/M, 8H/D, 7D/W	24 Ω	Time [h]	18,05	20,34
Remote control		Capacity [mAh]	973	1075
		Energy [mWh]	1265	1376
Discharge Type	Load	End Voltage[V]	1.0	0.9
4M/H, 8H/D, 7D/W	5.1 Ω	Time [m]	209	246
Portable Lighting		Capacity [mAh]	883	995
		Energy [mWh]	1021	1145
Discharge Type	Load	End Voltage[V]	1.0	0.9
1H/D, 7D/W	10 Ω	Time [h]	7,78	8.71
Personal Cassette Players /		Capacity [Ah]	0.93	1.02
Tape Recorders		Energy [Wh]	1.13	1.22
Discharge Type	Load	End Voltage[V]	1.0	0.9
4H/D, 7D/W	75 Ω	Time [h]	67,27	71.88
Transistor Radios		Capacity [Ah]	1,14	1.20
		Energy [Wh]	1.46	1.52

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.