


This is a controlled document.
 Hardcopy to be endorsed by authorised person.
 Check with Issuing Officer or SAP system for latest update.

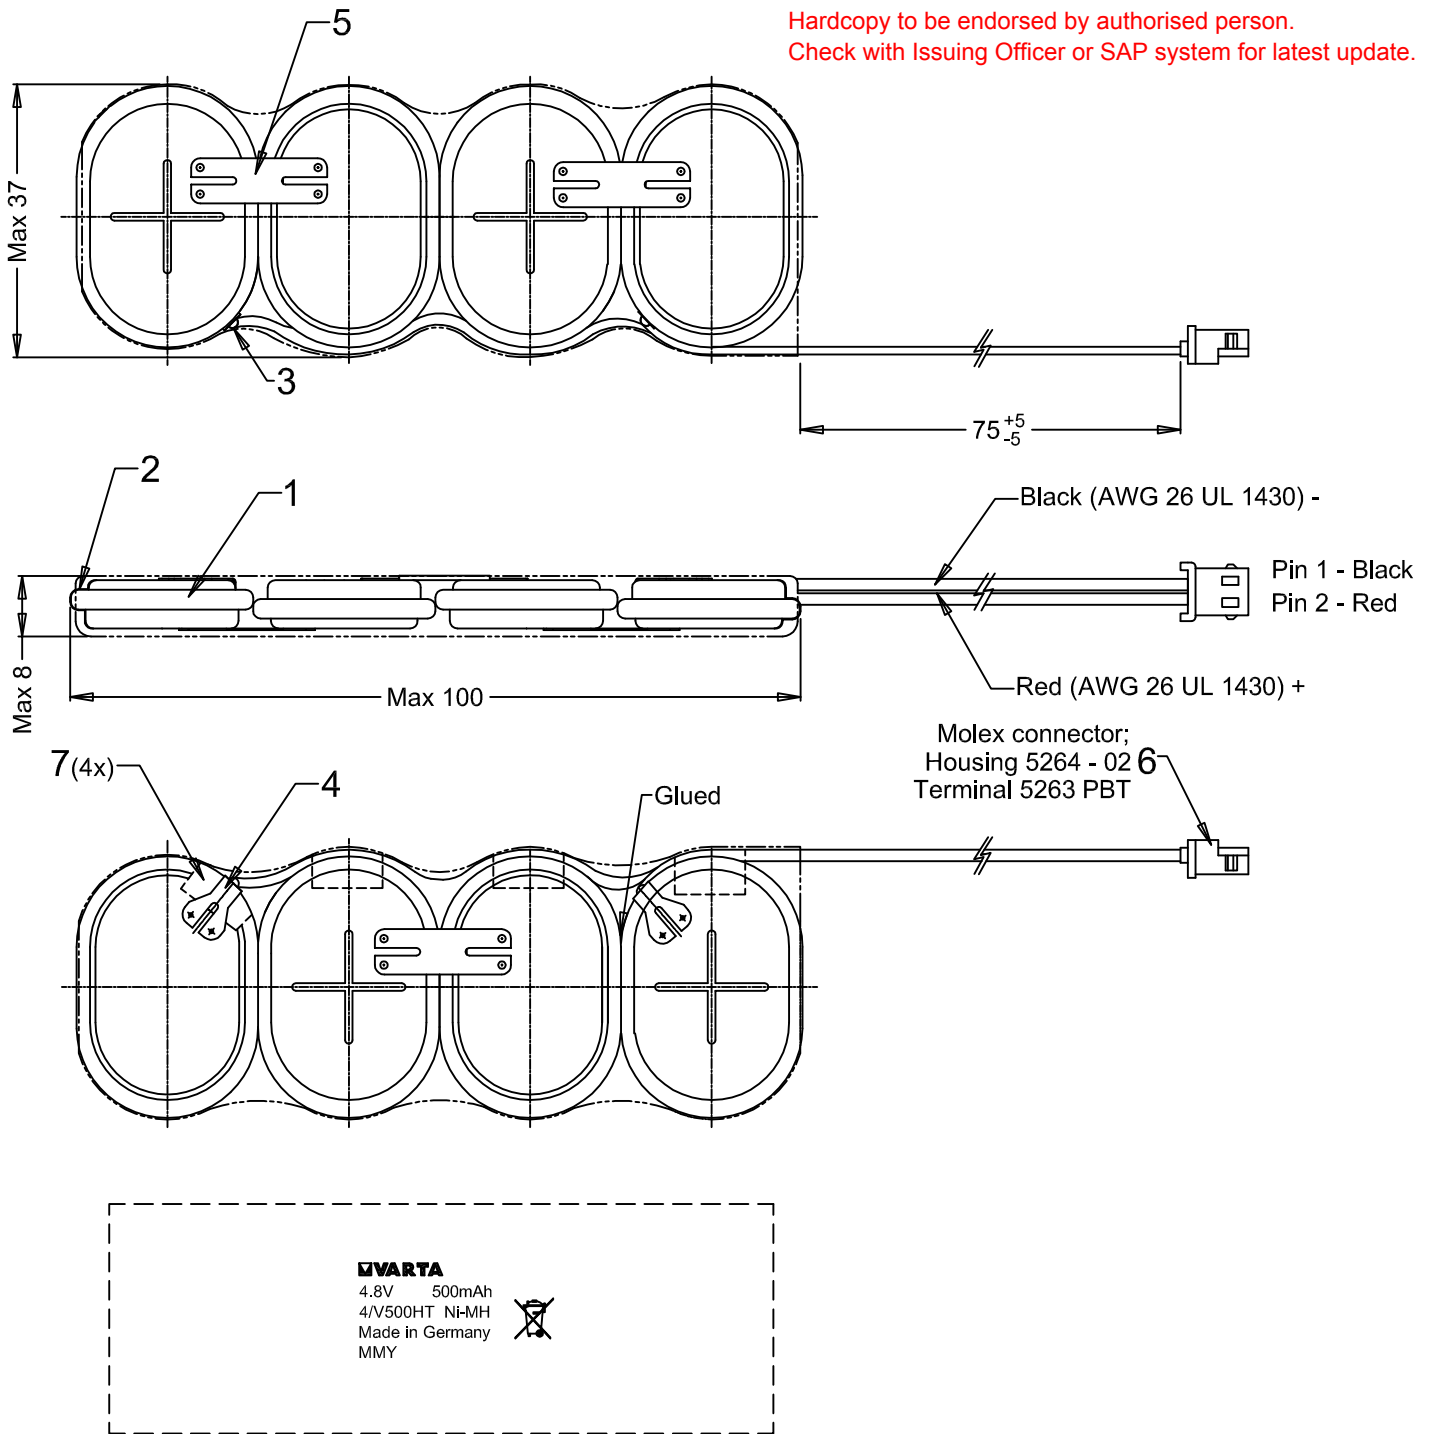

- Note : 1) Battery is totally insulated
 2) Cell deflection space of 1.2mm/cell is needed in case of abusive conditions.
 Please consult Varta for more details.
 3) Battery with non-standard wire connector polarity.

Approx. wt: 61g

0	026/09	Refer to provisional drawing p/n P22-00141Rev.001	2009-06-12	Ben
No	AO No	Revisions	1	Date Name
Projection:		Material: Refer to part list no : 703575	Description: 4/V500HT L S WC with shrink sleeve & wires connector	
Dimensions in mm	Prepared & Checked	Verified & Approved	Dwg. No: 703575	4 0 0
Tolerance: As specified	2009-06-12	Ben	VKB Order No: 55750 404 014	
Scale: 1 : 1				

Rights reserved to make technical changes, as a result of further development, without notice. This drawing is the property of VARTA Microbattery and must not be copied or disclosed to a third party without the written consent of VARTA Microbattery.

