


## Data Sheet

**Type Number** ..... 6430  
**Designation IEC** ..... CR 2430  
**System** ..... Li-Manganese dioxide / Organic Electrolyte

**UL Recognition:**..... MH 13654 (N)  
**Nominal Voltage** ..... 3 V  
**Typical Capacity C** ..... 300 mAh  
 Load 5.6 kOhm, at 20°C down to 2 V

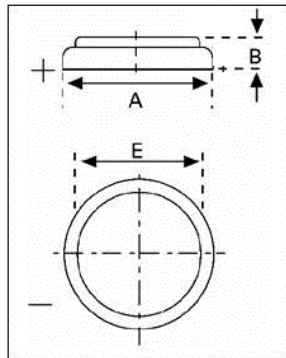

**Weight (approx.)** ..... 4 g  
**Volume** ..... 1,3 ccm  
**Coding**..... Date of Manufacturing Month/Year

**Temperature Ranges**

	min	max.
Storage .....	-55°C	70°C
Discharge .....	-30°C	60°C

**Dimensions**

	min	max.
Diameter (A) .....	24,2	24,5
Height (B) .....	2,7	3,0
Shoulder Diameter[E].....		

**Segment** ..... Electronic

**Main Applications** ..... Watch  
 Photo  
 Electronic

### Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	5600 Ω	Time:	600h
		Capacity [mAh]:	300
		Energy [mWh]:	840

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst  
 Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!  
 Date of issue: 2014-07-14