



MODEL TL-5276/W

For Utility Metering Memory Back-up Applications

TECHNICAL DATA




(Typical values @+25°C for batteries stored for one year or less)

- Nominal capacity @ 1 mA, to 2V 1.0 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 50 mA
- Maximum pulse current capability 100 mA
- Enclosure Lexan 143 UV stable
- Operating temperature range -55°C to +85°C
- U.L. Component Recognition, MH 12193

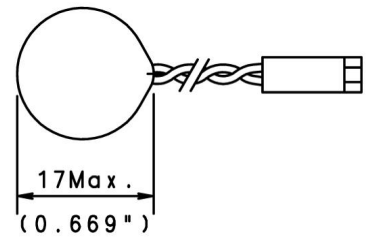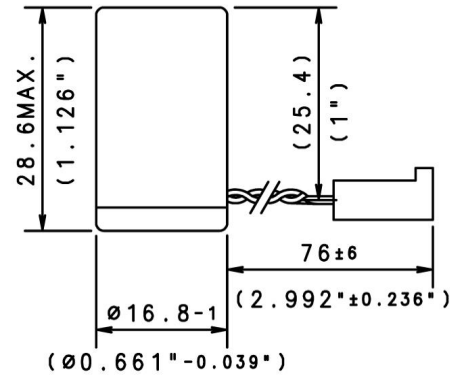

ADDITIONAL INFORMATION

CONNECTOR TYPE MOLEX P/N 22-01-3027
 OR COMPATIBLE
 CATALOGUE NO. 15-5276-30000

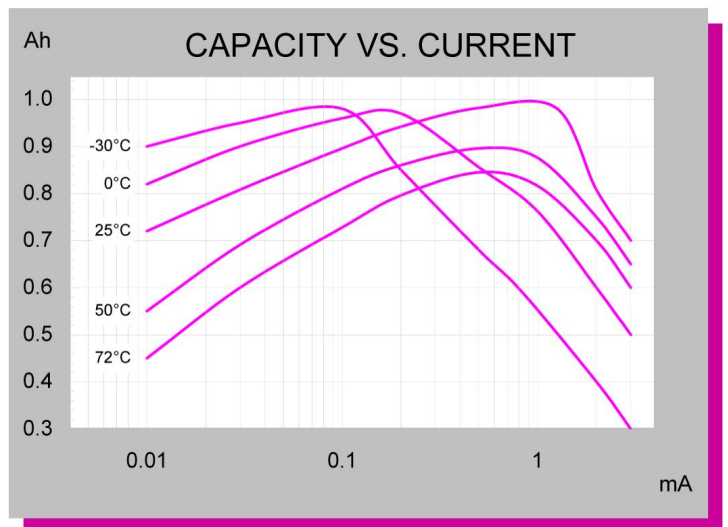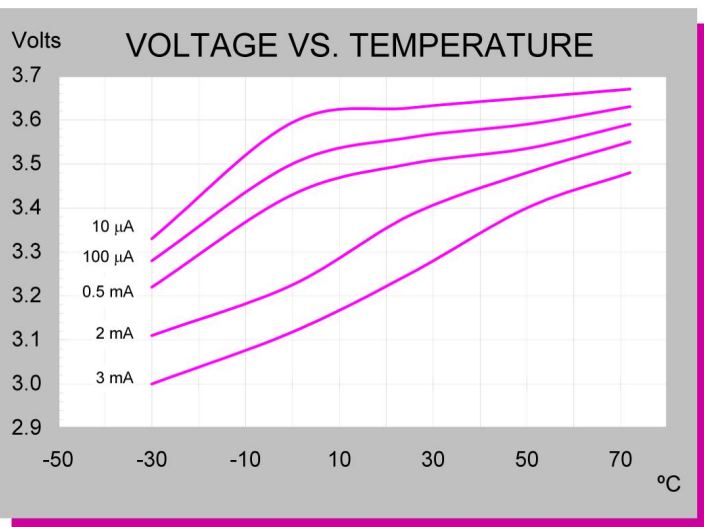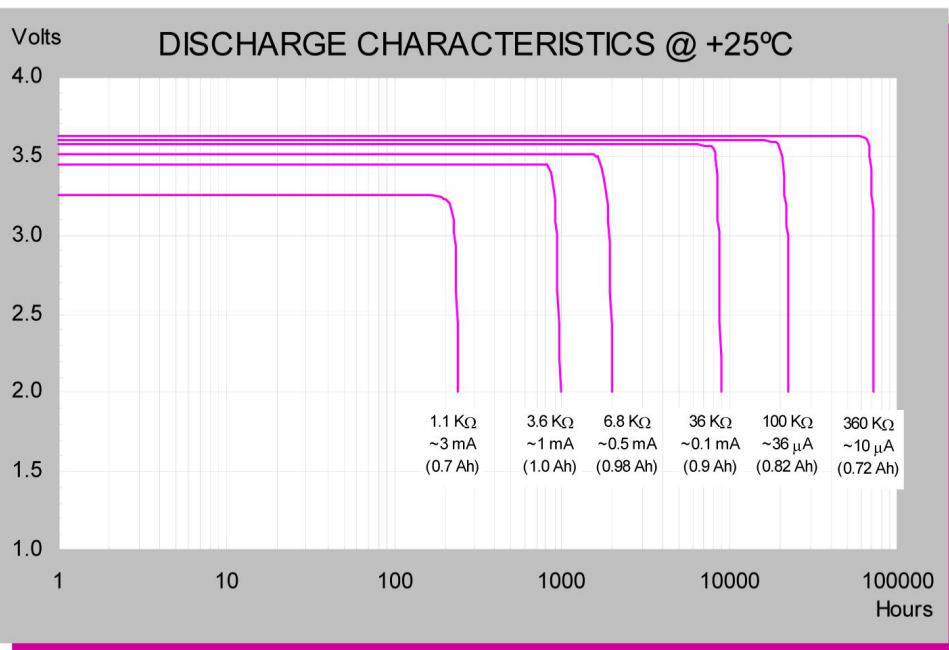

LITHIUM XTRA