


## Specifications

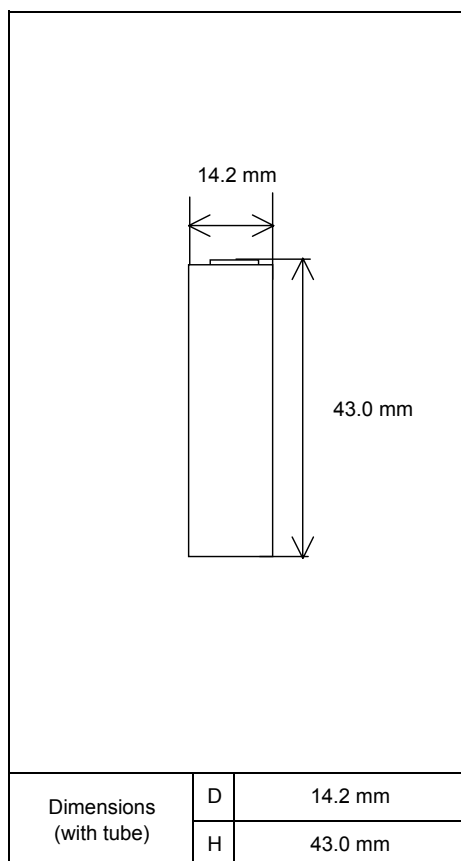

|                                                                    |                     |                           |                         |
|--------------------------------------------------------------------|---------------------|---------------------------|-------------------------|
| Type : Nickel-Metal Hydride Battery                                |                     |                           | Size : 4/5AA            |
| Capacity <sup>1)</sup>                                             | Typical             |                           | 1100mAh                 |
|                                                                    | Minimum             |                           | 1000mAh                 |
| Nominal Voltage                                                    |                     |                           | 1.2V                    |
| Charging Current x Time                                            |                     | Fast Charge <sup>2)</sup> | 1100 mA x about 1.1h    |
| Ambient Temp.                                                      | Charge Condition    | Fast Charge <sup>2)</sup> | 0°C - 40°C              |
|                                                                    | Discharge Condition |                           | 0°C - 50°C              |
|                                                                    | Storage Condition   | Less than 30days          | -20°C - 50°C            |
|                                                                    |                     | Less than 90days          | -20°C - 40°C            |
|                                                                    |                     | Less than 1year           | -20°C - 30°C            |
| Internal Impedance <sup>3)</sup><br>(after discharge to E.V.=1.0V) |                     |                           | Approx. 18mΩ(at 1000Hz) |
| Weight <sup>4)</sup>                                               |                     |                           | Approx. 23 g            |
| Size <sup>4)</sup> :(Diameter) x (Height)                          |                     |                           | 14.2(D) x 43.0(H) mm    |

1)Single cell capacity under the following condition.

Charge : 110mA×16h, Discharge : 220mA(E.V.=1.0V) at 20°C


2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition.

4)With tube.

## Typical Characteristics

### Charge

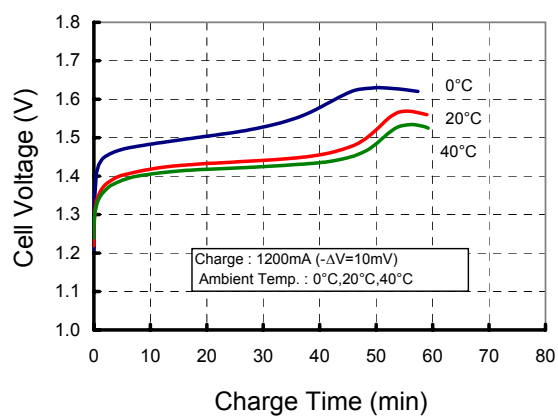

### Discharge

