

Features & Benefits


- High energy density and voltage
- Long, stable power with a flat discharge voltage
- Ideal for portable communications, portable computing, and robotics.

Specifications

| | |
|-------------------------------|--|
| Rated capacity ⁽¹⁾ | Min. 1150mAh |
| Capacity ⁽²⁾ | Min. 1150mAh Typ. 1200mAh |
| Nominal voltage | 3.7V |
| Charging | CC-CV, Std. 1150mA, 4.20V, 3.0 hrs |
| Weight (max.) | 22.3 g |
| Temperature | Charge: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C |
| Energy density | Volumetric: 455 Wh/l Gravimetric: 191 Wh/kg |


⁽¹⁾ At 20°C ⁽²⁾ At 25°C

Dimensions

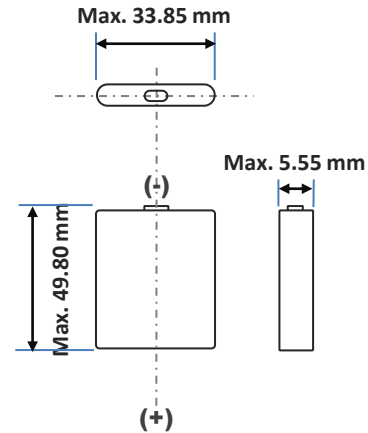


For Reference Only


Charge Characteristics

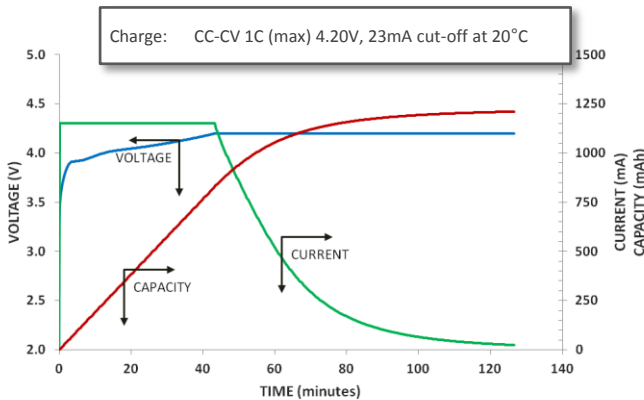


Cycle Life Characteristics

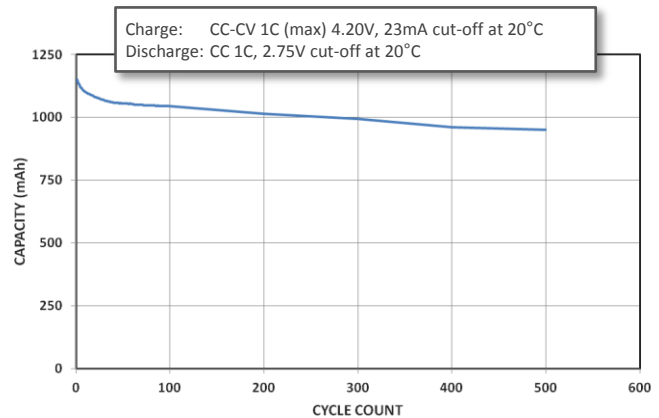

Discharge Characteristics (by temperature)

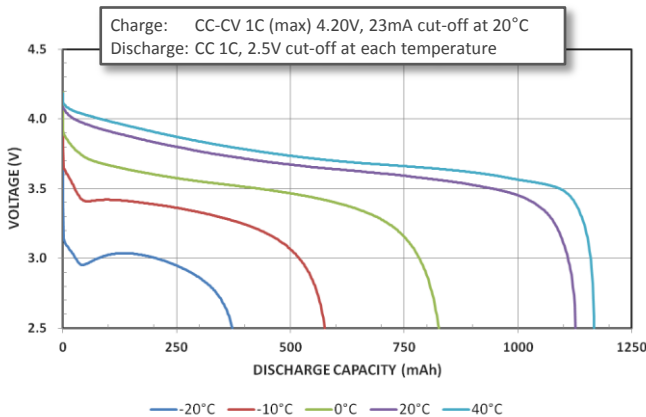

Discharge Characteristics (by rate of discharge)

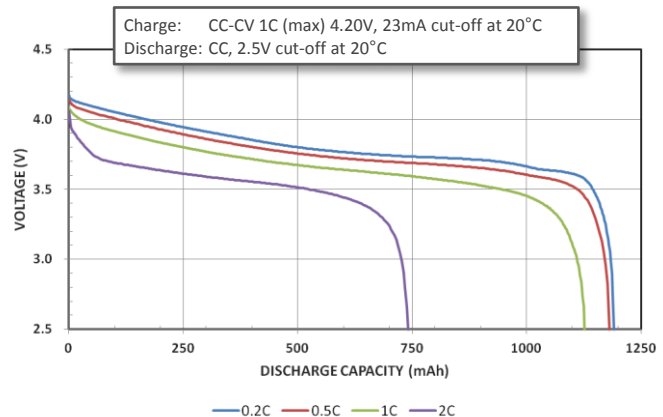

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.